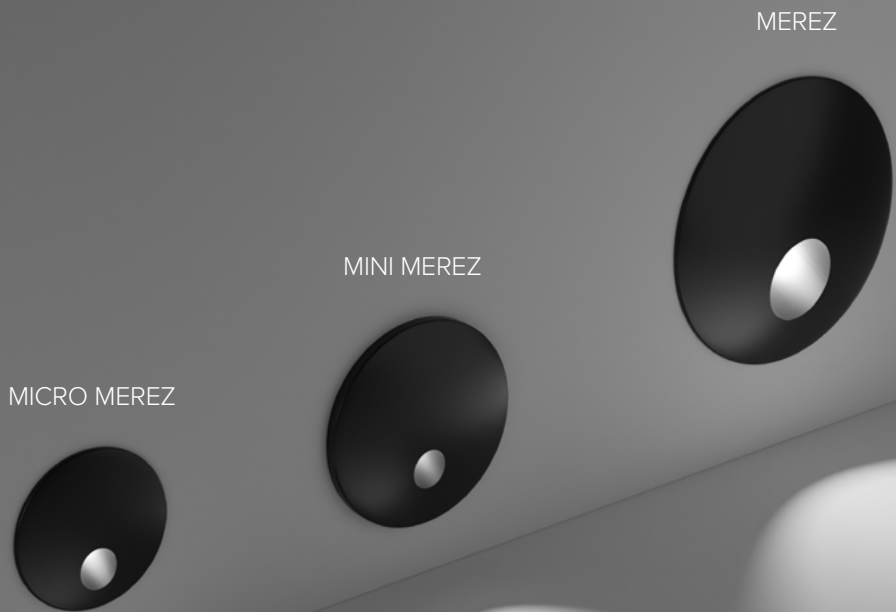




MICRO MEREZ	MINI MEREZ	MEREZ
Ø 29 mm / 1.1" 	Ø 40 mm / 1.6" 	Ø 58 mm / 2.3" 
28 mm / 1.1" 	28 mm / 1.1" 	47 mm / 1.9" 



MICRO MEREZ / MINI MEREZ

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
66708 MICRO MEREZ	2 24V DC power supply NOT included	5 3000K CRI93	1 PMMA
66707 MINI MEREZ	R  listed 24V DC power supply NOT included	8 2700K CRI93	
		I 2200K CRI80	
Example: BASE CODE 66708 A 2 B 5 C 1 D 6 = 66708-2516			
D . FINISHES			
2 black RAL 9005 	6 white RAL 9003 		
F golden bronze 			


MEREZ


ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
66705 MEREZ	8 48V DC power supply NOT included	5 3000K CRI93	1 PMMA
	R  listed 24V DC power supply NOT included	8 2700K CRI93	
		I 2200K CRI80	
Example: BASE CODE 66705 A 8 B 5 C 1 D 6 = 66705-8516			
D . FINISHES			
A grey RAL 9006 	6 white RAL 9003 		
2 black RAL 9005 	F golden bronze 		

MEREZ

ACCESSORIES

REQUIRED ACCESSORIES		code	description			dimensions mm
	69396	69396	MINI MEREZ: housing box for millwork			Ø46xH30
		code	output power	input voltage / frequency	IP	dimensions mm
		69041	18W	198-264V	50-60Hz	IP20 L124xW42xH30
		69204	20W	99-264V	50-60Hz	IP20 L103xW67xH21
		69212	20W	99-264V	50-60Hz	IP20 L103xW67xH21
		code	output power	input voltage / frequency	IP	dimensions mm
		69181	40W	90-305V	47-63Hz	IP54 L163xW43xH32
		69185	40W	90-305V	47-63Hz	IP67 L171xW62xH37
		69195	75W	100-305V	47-63Hz	IP67 L180xW63xH36
		code	output power	input voltage / frequency	IP	dimensions mm
		69096	55W	99-264V	50-60Hz	IP20 L129xW76xH30
		69097	120W	90-305V	47-63Hz	IP67 L191xW63xH38
		Consult B LIGHT North America Lighting Group Network T: 212.775.6363 E: info@lightinggroupnetwork.com				

OPTIONAL ACCESSORIES		code	description			dimensions mm
	69302	69302	MEREZ: housing box for concrete			Ø50xH130



*To choose the power supply, always add a spare 20% as safety margin.
See pag 505 for cable size and max wiring distance from power supply to last connected luminaire