






JOLI 1 - POLE BY OTHERS

JOLI

SPECIFICATIONS

| | |
|--------------------|---|
| base code | 67741 JOLI 1 (round module only), 67744 JOLI 2 (one projector only) |
| typology | Pole-top luminaire with round module and/or projectors |
| mounting | In the ground |
| diameter | Pole by others: 60 mm / 2.4" Round module: 400 mm / 15.8" Projector: 55 mm / 2.2" |
| height | Round module: 80 mm / 3.2" Projector: 220 mm / 8.7" |
| construction | Round module: iron. Projector: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket |
| finishes | Powder coated |
| ingress protection | JOLI 1: IP65. North America wet location. JOLI 2: IP66. North America wet location. Built-in protection from water infiltration and moisture |
| lamp type | LED array on printed circuit board. Remote power supply not included |
| lamp wattage | JOLI 1: 40W at 24V DC - JOLI 2: 15W at 24V DC (5W per projector) |
| lamp lumens | Round module 4120lm. Projector: 550lm |
| delivered lumens | Round module 3280lm. Projector: 390lm |
| lumen maintenance | 50.000h L90 |
| beam | Round module: diffused. Projector 20°, 30°. Adjustable 355° on the horizontal plane and 360° on the vertical plane |
| kelvin | 2200K CRI80 (JOLI 2 only), 2700K CRI93 or 3000K CRI93 / 3 step MacAdam |
| special features | JOLI 1: unpolarized electronic system - Two wires dimming – Diffuse and completely homogenous light distribution across the entire surface. JOLI 2: Reverse polarity protection. Thermal Sensor - Safe wiring - Two wires dimming - Water stop technology |
| dimming options | Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply |
| certifications | CE, ETL listed for wet location |

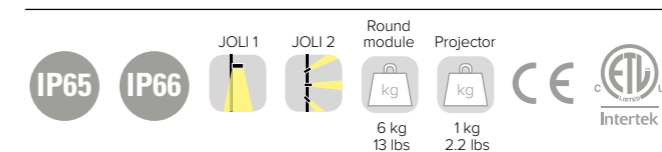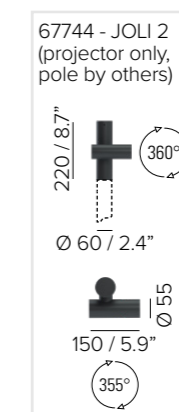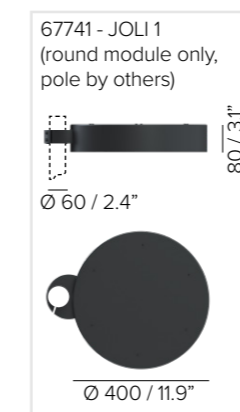

JOLI 1

ORDER CODE

BASE CODE

67741 JOLI 1
(round module only)

*pole by others

A . POWER SUPPLY

R  listed
24V DC
power supply
NOT included

B . KELVIN


5 3000K CRI93
8 2700K CRI93

C . BEAM

A satin diffuser

Example: BASE CODE A B C D
67735 8 8 A Q = 67735-88AQ

D . FINISHES

Q anthracite
RAL 7024 

JOLI

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Class 2 power supply
24V DC

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



| code | description | dimensions mm |
|-------|--|---------------|
| 69842 | IP68 connector, 1 IN - 1 OUT, 2 wires | W37xD22xH37 |
| 69847 | IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires | W45xD30xH17 |
| 69848 | IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires (US market) | W78xD30xH20 |

JOLI 2

ORDER CODE

BASE CODE

67744 JOLI 2
(one projector only, max three per pole)

*pole by others

A . POWER SUPPLY

R  listed
24V DC
power supply
NOT included

B . KELVIN


5 3000K CRI93
8 2700K CRI93
I 2200K CRI80

C . BEAM

2 spot 20°
4 flood 30°

Example: BASE CODE A B C D E
67738 8 8 2 Q B = 67738-882QB

D . FINISHES

Q anthracite
RAL 7024 

E . LENS

A honeycomb  **B** clear 

