


# FIREFLY NEW


## SPECIFICATIONS

base code	672
typology	Garden luminaire with omnidirectional light distribution
mounting	On ground with stem. Cable length 2000 mm / 78.7"
height	1140 mm / 44.9" - 1440 mm / 56.7" - 1740 mm / 68.5" - 2040 mm / 80.3"
diameter	Fixture: 20 mm / 0.8". Stem: 6 mm / 0.2"
construction	Fixture: turning and milling aluminium. Diffuser in PMMA complete with silicone gasket. Flexible stem in composite carbon fiberglass
finishes	Powder coated
ingress protection	IP66. North America wet location
lamp type	LED on printed circuit board. Remote power supply not included
lamp wattage	1W at 24V DC
lamp lumens	100lm
delivered lumens	35lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse polarity protection - Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	ETL listed for wet location

CYLINDER DIFFUSER

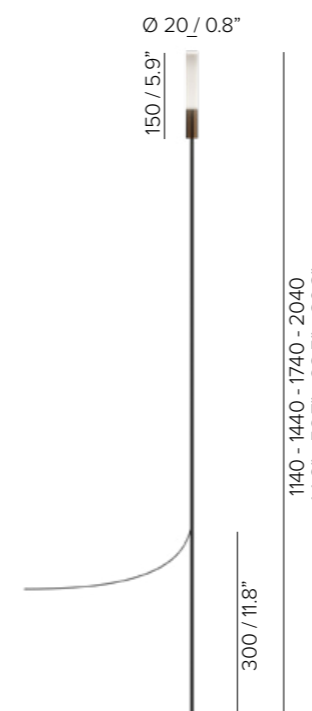

SPHERE DIFFUSER

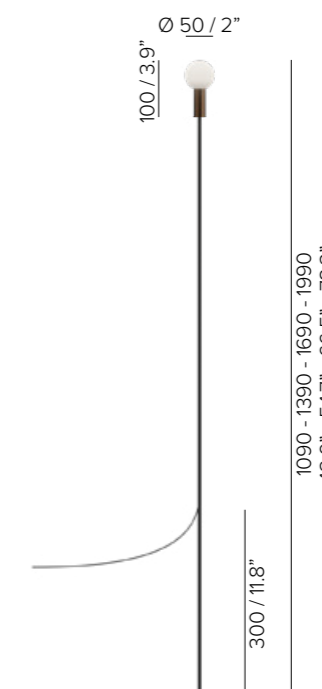




0.2 kg\*  
1.1 lbs\*


\* weight referred to the 1140 mm / 44.9" model



# FIREFLY

## ORDER CODE

BASE CODE	A1. STEM HEIGHT	A. POWER SUPPLY	B. KELVIN	C. DIFFUSER
<b>672</b>	<b>31</b> 1140 mm <b>32</b> 1440 mm <b>33</b> 1740 mm <b>34</b> 2040 mm	<b>R</b>  listed 24V DC power supply NOT included	<b>5</b> 3000K CRI93 <b>8</b> 2700K CRI93 <b>I</b> 2200K CRI80	<b>1</b> cylinder  <b>3</b> sphere 

Example: BASE CODE **672** A1 **31** A **R** B **8** C **1** D **F** = **67231-R81F**

D. FINISHES
<b>F</b> golden bronze 

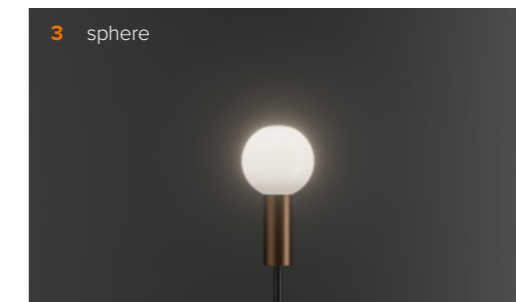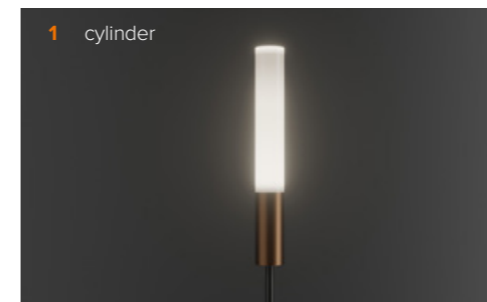

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

Class 2 power supply  
24V DC

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

### OPTIONAL ACCESSORIES



code	description	dimensions mm
69864	stainless steel AISI 304 spike	Ø42xH200

CONTINUOUS MOVEMENT WITH BREEZE