





# GARDEN RAZOR NEW



## SPECIFICATIONS

base code	672
typology	Linear garden luminaire with light distribution on one side
mounting	On ground with stem. Cable length 2000 mm / 78.7"
height	1030 mm / 40.6" or 1630 mm / 64.2"
diameter	End cap: 15 mm / 0.6". Stem: 6 mm / 0.2"
construction	End cap: turning and milling aluminum. Fixture: Flexible stem in composite carbon fiberglass. Lower section: stainless steel AISI 304
finishes	Marine grade powder coated (end cap)
ingress protection	IP66. North America wet location
lamp type	Linear LED array on printed circuit board. Height 1030mm: PCB L 500 mm / 19.6". Height 1630mm: PCB L 1000 mm / 39.2". Remote power supply not included
lamp wattage	Height 1030 mm: 3W at 48V DC. North America 24V DC Height 1630 mm: 6W at 48V DC. North America 24V DC
lamp lumens	3W: 300lm. 6W: 600lm
delivered lumens	3W: 30lm. 6W: 60lm
lumen maintenance	50.000h L90
beam	Diffused
kelvin	2200K CRI93, 2700K CRI93 or 3000K CRI93 / 3 step MacAdam ellipse
special features	Reverse polarity protection - Water stop technology - Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

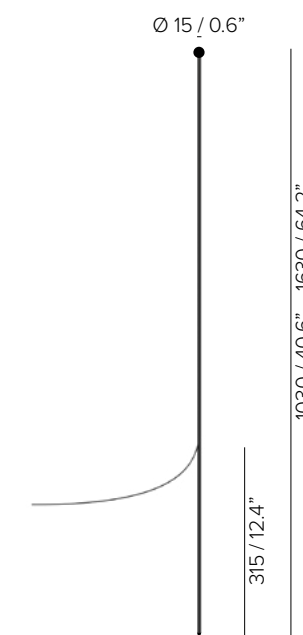

\* weight referred to the 1000 mm / 39.4" model





# GARDEN RAZOR

## ORDER CODE

BASE CODE	A1 . STEM HEIGHT	A . POWER SUPPLY	B . KELVIN	C . DIFFUSER
<b>672</b>	<b>43</b> 1030 mm <b>45</b> 1630 mm	<b>8</b> 48V DC power supply NOT included  <b>R</b> listed 24V DC power supply NOT included	<b>5</b> 3000K CRI93 <b>8</b> 2700K CRI93 <b>D</b> 2200K CRI93	<b>1</b> frosted

Example: BASE CODE **672** A1 **43** A **8** B **8** C **1** D **2** = **67243-8812**

## D . FINISHES

- 2** black RAL 9005

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
69180	30W	90-264V 47-63Hz	IP20	L160xW46xH30
69185	40W	90-305V 47-63Hz	IP67	L171xW62xH37
69195	75W	100-305V 47-63Hz	IP67	L180xW63xH36
69096	55W	99-264V 50-60Hz	IP20	L129xW76xH30

Power supply 48V DC\*, ON/OFF\* ambient temperature up to 60° C

Power supply 48V DC, 1-10V<sup>®</sup> or ON/OFF\* ambient temperature up to 60° C

Power supply 48V DC\*, DALI<sup>®</sup> ambient temperature up to 60° C

Power supply 48V DC, 1-10V and DALI

Class 2 power supply 24V DC

<sup>1</sup>for a perfect dimming, it is necessary that the power supply is saturated to 100%

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com




code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

### OPTIONAL ACCESSORIES



code	description	dimensions mm
69864	stainless steel AISI 304 spike	Ø42xH200

The luminaire offers a **longitudinal cut-off** delivering glare free homogeneous light

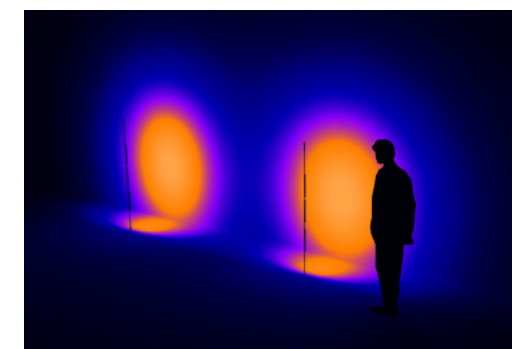

- 2lx
- 4lx
- 8lx
- 16lx





CONTINUOUS MOVEMENT WITH BREEZE

