





# MAIA ET

## SPECIFICATIONS



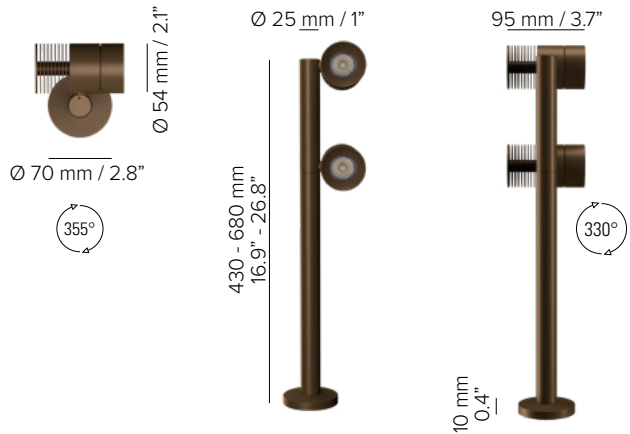




base code	672
typology	Pole light with two independent spotlights which can be aimed in two different directions
mounting	On surface by fixing base or on ground using spike (code 69862) to be separately ordered as accessory
stem height	430 mm - 680 mm / 16.9" - 26.8"
diameter	54 mm / 2.1"
length	95 mm / 3.7"
construction	Fixture: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	LED array on printed circuit board. Remote power supply not included
lamp wattage	12W (6W per spotlight) at 48V DC and 500 mA. North America 24V DC and 500 mA
lamp lumens	630lm per spotlight
delivered lumens	400lm (3000K CRI93, 36°) per spotlight
lumen maintenance	50.000h L90
beam	16°, 36°, 45°. Each spotlight has adjustable arm allowing 355° rotation on the horizontal plane and 330° on the vertical plane
kelvin	2200K CRI80, 2200K CRI93, 2700K CRI93, 3000K CRI93 / 3 step MacAdam ellipse
special features	Water drainage system. Water stop technology. Unpolarized electronic system (24V DC: reverse polarity protection). Safe wiring. 48V DC, 24V DC: Thermal Sensor. Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location



\* weight referred to the 430mm / 16.93" model

# MAIA ET

## ORDER CODE

BASE CODE	A1. STEM HEIGHT	A . POWER SUPPLY	B . KELVIN	C . BEAM
672	14 430 mm 15 680 mm	8 48V DC power supply NOT included  L 500 mA power supply NOT included  R  listed 24V DC power supply NOT included  U  listed 500 mA power supply NOT included	5 3000K CRI93 8 2700K CRI93 D 2200K CRI93 (500 mA) I 2200K CRI80 (24/48V DC)	2 spot 16° 4 flood 36° 5 wide flood 45°
Example: BASE CODE A1 A B C D E = 672148846A = 67214-8846A				
D . FINISHES	E . OTHER			
F golden bronze 	A grey RAL 9006 	A spike mounting 		
Q anthracite RAL 7024 	B surface mounting 			



# MAIA ET

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency		IP	dimensions mm
Power supply 48V DC, 1-10V <sup>(1)</sup> or ON/OFF* ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz	IP67	L171xW62xH37
	69186	60W	90-305V	47-63Hz	IP67	L171xW62xH37
	69187	100W	90-305V	47-63Hz	IP67	L220xW68xH39
Power supply 48V DC*, DALI <sup>(1)</sup> ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67	L180xW63xH36
	69196	100W	100-305V	47-63Hz	IP67	L199xW63xH36
	<sup>1</sup> for a perfect dimming, it is necessary that the power supply is saturated to 100%					
Power supply 48V DC, 1-10V and DALI	69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30
Power supply 500 mA max No. fixtures	69088	ON/OFF, 20W / max 1	100-264V	50-60Hz	IP20	L135xW38xH28
	69091	1-10V, 20W / max 1	99-264V	50-60Hz	IP20	L120xW52xH22
	69080	DALI, 20W / max 1	220-240V	50-60Hz	IP20	L120xW52xH22
	69206	DALI, 24W / max 1	99-264V	50-60Hz	IP67	L122xW54xH26



Class 2 power supply  
24V DC-500 mA  
 listed

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

### OPTIONAL ACCESSORIES



code	description	dimensions mm
69862	spike	W60xD30xH240
69876-6	anti-glare snoot - white RAL 9003	Ø56xH85
69876-A	anti-glare snoot - grey RAL 9006	Ø56xH85
69876-F	anti-glare snoot - golden bronze	Ø56xH85
69876-Q	anti-glare snoot - anthracite RAL 7024	Ø56xH85

### SPECIAL FEATURE: WATER DRAINAGE SYSTEM



When aimed upwards, the water is collected in the cup and is drained from the bezel cavities

