





MAIA X1 DUO

SPECIFICATIONS

| | |
|--------------------|---|
| base code | 67259 |
| typology | Projector |
| mounting | On surface by fixing base or on ground using stainless steel AISI 304 spike (code 69861) to be separately ordered as accessory |
| height | 160 mm / 6.3" |
| diameter | 89 mm / 3.5" |
| length | 142 mm / 5.6" |
| construction | Fixture: turning and milling aluminum. Stainless steel A2 screws. Reflector: polycarbonate. Protective glass complete with silicone gasket |
| finishes | Powder coated |
| ingress protection | IP66. North America wet location. Built-in protection from water infiltration and moisture |
| lamp type | COB. Remote power supply not included |
| lamp wattage | 16W at 48V DC and 500 mA. North America 500 mA |
| lamp lumens | 2700K CRI93 - 1780lm, 3000K CRI93 - 1840lm, 4000K CRI93 - 1970lm |
| delivered lumens | 1300lm (3000K CRI93, 36°) |
| lumen maintenance | 50.000h L90 |
| beam | 15°, 36°, 51°. Adjustable 330° on the vertical plane |
| kelvin | 2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse |
| special features | Water drainage system - Water stop technology. 48V DC: unpolarized electronic system - Thermal Sensor - Safe wiring |
| dimming options | Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories |
| listings | CE, ETL listed for wet location |

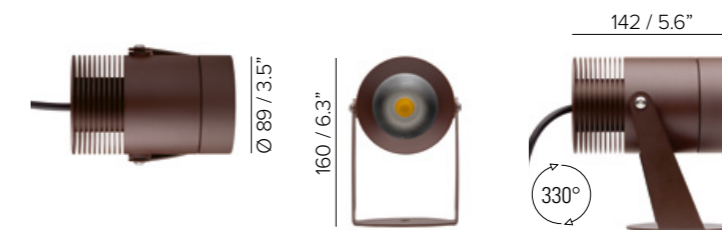

MAIA X1 DUO

ORDER CODE

BASE CODE

67259

A . POWER SUPPLY

- 8** 48V DC power supply NOT included
- L** 500 mA power supply NOT included
- U**  listed 500 mA power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . BEAM

- 2** spot 15°
- 4** flood 36°
- 5** wide flood 51°

BASE CODE

Example: **67259 8 8 4 A = 67259-884A**

D . FINISHES

- A** grey RAL 9006 
- Q** anthracite RAL 7024 

- F** golden bronze 



MAIA X1 DUO

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

| code | output power | input voltage / frequency | IP | dimensions mm |
|----------------|---------------------|---------------------------|--------------|---------------|
| 69180 | 30W | 90-264V | 47-63Hz IP20 | L160xW46xH30 |
| 69185 | 40W | 90-305V | 47-63Hz IP67 | L171xW62xH37 |
| 69186 | 60W | 90-305V | 47-63Hz IP67 | L171xW62xH37 |
| 69187 | 100W | 90-305V | 47-63Hz IP67 | L220xW68xH39 |
| 69195 | 75W | 100-305V | 47-63Hz IP67 | L180xW63xH36 |
| 69196 | 100W | 100-305V | 47-63Hz IP67 | L199xW63xH36 |
| 'on / off only | | | | |
| 69088 | ON/OFF, 20W / max 1 | 100-264V | 50-60Hz IP20 | L135xW38xH28 |
| 69091 | 1-10V, 20W / max 1 | 99-264V | 50-60Hz IP20 | L120xW52xH22 |
| 69080 | DALI, 20W / max 1 | 220-240V | 50-60Hz IP20 | L120xW52xH22 |
| 69206 | DALI, 24W / max 1 | 99-264V | 50-60Hz IP67 | L122xW54xH26 |

Class 2 power supply 500 mA

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com



| code | description | dimensions mm |
|-------|--|---------------|
| 69841 | IP68 connector, 1 IN - 1 OUT, 3 wires | W42xD29xH42 |
| 69843 | IP68 connector, 1 IN - 3 OUT, parallel wiring, 4 wires | W78xD30xH20 |

OPTIONAL ACCESSORIES

| code | description | dimensions mm |
|---------|--|---------------|
| 69861 | stainless steel AISI 304 spike | Ø95xH200 |
| 69877-6 | anti-glare snoot - white RAL 9003 | Ø91xH138 |
| 69877-A | anti-glare snoot - grey RAL 9006 | Ø91xH138 |
| 69877-F | anti-glare snoot - golden bronze | Ø91xH138 |
| 69877-Q | anti-glare snoot - anthracite RAL 7024 | Ø91xH138 |

SPECIAL FEATURE: WATER DRAINAGE SYSTEM



When aimed upwards, the water is collected in the cup and is drained from the bezel cavities

