



MEROPE 100 / MEROPE 100 AD

SPECIFICATIONS

base code	67032 MEROPE 100 - 67044 MEROPE 100 AD
typology	MEROPE 100: Uplight with a drive over load of 3,5 tonnes / 7000 lbs MEROPE 100 AD: Adjustable uplight with a drive over load of 3,5 tonnes / 7000 lbs
mounting	Using housing box to be separately ordered as accessory
diameter	Flush faceplate: 100 mm / 3.9". Protruding faceplate: 115 mm / 4.5"
height	MEROPE 100: 97 mm / 3.8" - MEROPE 100 AD: 86 mm / 3.4"
required depth	Depending on housing box
first fit requirement	Yes, separate housing box: code 69477 or 69478 for millimetric height adjustment from 0 to 50 mm / from 0" to 2"
floor cut out	Depending on housing box
construction	Fixture: turning and milling aluminum. Faceplate in stainless steel AISI 304. Stainless steel A2 screws. Protective tempered glass complete with silicone gasket. Reflector: polycarbonate. Housing box in PVC
finishes	Fixture anodized and faceplate in brushed stainless steel AISI 304. Glass surface
ingress protection	IP67. North America wet location. Built-in protection from water infiltration and moisture
lamp type	MEROPE 100: COB. MEROPE 100 AD: LED array on printed circuit board. Remote power supply not included
lamp wattage	MEROPE 100: 12W at 48V DC. North America 350 mA MEROPE 100 AD: 5W at 48V DC. North America 24V DC
lamp lumens	MEROPE 100: 1320lm. MEROPE 100 AD: 540lm
delivered lumens	MEROPE 100: 980lm. MEROPE 100 AD: 340lm
lumen maintenance	50.000h L90
beam	MEROPE 100: 26°, 37°, 51°. Honeycomb for visual comfort to be specifically ordered MEROPE 100 AD: 20°, 30°. Tilt system from 0° to 20° allowing adjustment without opening the luminaire
kelvin	2200K CRI80, 2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Safe wiring - Water stop technology. MEROPE 100: 48V DC: unpolarized electronic system - Thermal Sensor MEROPE 100 AD: 48V DC: unpolarized electronic system. 24V DC: reverse polarity protection. Thermal Sensor - Two wires dimming
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location



MEROPE 100 - PROTRUDING FACEPLATE

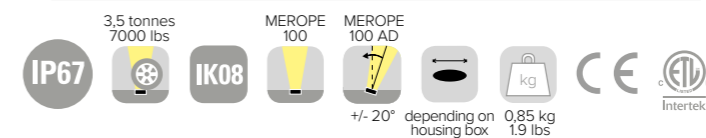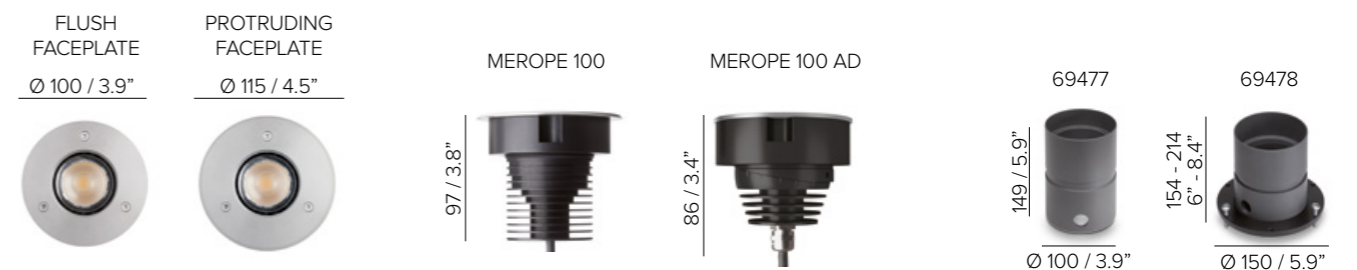



MEROPE 100 / MEROPE 100 AD

ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM	D . FINISHES
67032 MEROPE 100 12W	8 48V DC power supply NOT included	4 4000K CR193 ¹	MEROPE 100	A stainless steel flush faceplate
67044 MEROPE 100 AD 5W	R listed 24V DC power supply NOT included <i>MEROPE 100 AD ONLY</i>	5 3000K CR193	2 spot 26°	B stainless steel protruding faceplate
	U listed 350 mA power supply NOT included <i>MEROPE 100 ONLY</i>	8 2700K CR193	4 flood 37°	
		I 2200K CR180 ²	5 wide flood 51°	
		¹ 4000K not available for MEROPE 100 AD	MEROPE 100 AD	
		² 2200K available for MEROPE 100 AD only	2 spot 20°	
			4 flood 30°	

Example: BASE CODE **67032** A **8** B **5** C **2** D **A** E **A** F **S** = **67032-852AAS**

E . LENS

A honeycomb



B clear




MEROPE 100 ONLY

F . OTHER

S screws on faceplate



N no screws on faceplate³



³ the faceplate can be removed without tools. Don't choose this option when the fixture will be installed in public spaces.

Available for North America only

MEROPE 100

Beam angles: 26°, 37°, 51°



MEROPE 100 AD

Beam angles: 20°, 30°



TILT SYSTEM ALLOWING ON SITE ADJUSTMENT FROM 0° TO 20° WITHOUT OPENING THE LUMINAIRE

FACEPLATE OPTIONS

PROTRUDING FACEPLATE

finished floor level

FLUSH FACEPLATE





MEROPE 100 / MEROPE 100 AD

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED



Power supply
48V DC*, ON/OFF
ambient temperature up to 60°C

Power supply
48V DC*, DALI®
ambient temperature up to 60°C

Power supply
48V DC, 1-10V and DALI
(MEROPE 100 AD ONLY)

Class 2 power supply
24V DC
350 mA



code	description	dimensions mm
69477	housing box for concrete	Ø100xH149
69478	height adjustable housing box for concrete	Ø150xH154-214
69592	suction cup for the extraction of the luminaire	W50xH40

code	output power	input voltage / frequency	IP	dimensions mm
69180	30W	90-264V	47-63Hz IP20	L160xW46xH30
69185	40W	90-305V	47-63Hz IP67	L171xW62xH37
69186	60W	90-305V	47-63Hz IP67	L171xW62xH37
69187	100W	90-305V	47-63Hz IP67	L220xW68xH39

² for a perfect dimming, it is necessary that the power supply is saturated to 100%

69195	75W	100-305V	47-63Hz IP67	L180xW63xH36
69196	100W	100-305V	47-63Hz IP67	L199xW63xH36

'on / off only

69096	55W	99-264V	50-60Hz IP20	L129xW76xH30
-------	-----	---------	--------------	--------------

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

code	description	dimensions mm
69841	IP68 connector, 1 IN - 1 OUT	W42xD29xH42
69842	IP68 connector, 1 IN - 1 OUT, 2 wires for MEROPE 100 AD	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires for MEROPE 100 AD	W45xD30xH17