




# OKKIO 130 CL

## SPECIFICATIONS

base code	67114
typology	Ceiling mounting luminaire
mounting	To ceiling using mounting plate
diameter	130 mm / 5.1"
height	210 mm / 8.3"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. 48V DC and 700 mA: Remote power supply not included. 230V AC: Power supply integrated into fixture
lamp wattage	20W at 48V DC, 700 mA or 230V AC. North America 700 mA
lamp lumens	2700K CRI93 - 2390lm, 3000K CRI93 - 2480lm, 4000K CRI93 - 2660lm
delivered lumens	2090lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	22°, 45°, 58°
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	48V DC: unpolarized electronic system - Thermal Sensor - Safe wiring
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

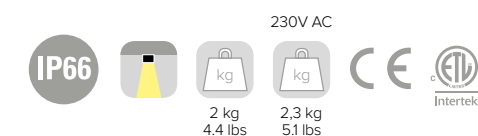



# OKKIO 130 CL

## ORDER CODE

### BASE CODE

**67114**

### A . POWER SUPPLY

**8** 48V DC  
power supply  
NOT included

**L** 700 mA  
power supply  
NOT included

**6** 230V AC

**U**  listed  
700 mA  
power supply  
NOT included

### B . KELVIN

**4** 4000K CRI93

**5** 3000K CRI93

**8** 2700K CRI93

### C . BEAM

**2** spot 22°

**4** flood 45°

**5** wide flood 58°

Example: BASE CODE **67114** A **8** B **8** C **4** D **6** = **67114-8846**

### D . FINISHES

**2** black  
RAL 9005



**6** white  
RAL 9003



**E** white  
RAL 9003  
black reflector  
RAL 9005



**F** golden  
bronze







# OKKIO 130 CL

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency		IP	dimensions mm
Power supply 48V DC*, ON/OFF	69180	30W	90-264V	47-63Hz	IP20	L160xW46xH30
	69181	40W	90-305V	47-63Hz	IP67	L163xW43xH32
	69182	60W	90-305V	47-63Hz	IP67	L163xW43xH32
	69187	100W	90-305V	47-63Hz	IP67	L220xW68xH39
	69188	150W	90-305V	47-63Hz	IP67	L228xW68xH39
	Power supply 48V DC*, ON/OFF ambient temperature up to 60° C	69185	40W	90-305V	47-63Hz	IP67
69186		60W	90-305V	47-63Hz	IP67	L171xW62xH37
69187		100W	90-305V	47-63Hz	IP67	L220xW68xH39
69188		150W	90-305V	47-63Hz	IP67	L228xW68xH39
Power supply 48V DC*, DALI® ambient temperature up to 60° C	69195	75W	100-305V	47-63Hz	IP67	L180xW63xH36
	69196	100W	100-305V	47-63Hz	IP67	L199xW63xH36
	69197	150W	100-305V	47-63Hz	IP67	L219xW63xH36
	*on / off only					
Power supply 700 mA max No. fixtures	69089	ON/OFF, 25W / max 1	176-264V	50-60Hz	IP20	L135xW38xH28
	69092	1-10V, 25W / max 1	99-264V	50-60Hz	IP20	L103xW67xH21
	69074	DALI, 32W / max 1	110-240V	50-60Hz	IP20	L103xW67xH21
	69207	DALI, 30W / max 1	99-264V	50-60Hz	IP67	L122xW54xH26

### Class 2 power supply 700 mA

Consult **B LIGHT North America**  
Lighting Group Network  
T: 212.775.6363  
E: info@lightinggroupnetwork.com



code	description	dimensions mm
69841	IP68 connector, 1 IN - 1 OUT, 3 wires	W42xD29xH42

\*To choose the power supply, always add a spare 20% as safety margin.  
See pag 495 for cable size and max wiring distance from power supply to last connected luminaire