

# OKKIO 80 CL / OKKIO 80 AD





## SPECIFICATIONS

base code	65252 OKKIO 80 CL - 65302 OKKIO 80 AD
typology	Glare free ceiling mounting luminaire. Adjustable light distribution for OKKIO 80 AD
mounting	To ceiling using mounting plate
diameter	80 mm / 3.2"
height	130 mm / 5.1"
construction	Fixture: turning and milling aluminum. Reflector: polycarbonate. Protective glass in PMMA or softening glass
finishes	Powder coated
ingress protection	OKKIO 80 CL: IP30, IP44 or IP66. North America dry, damp or wet location OKKIO 80 AD: IP30. North America dry location
lamp type	COB. Remote power supply not included
lamp wattage	13W at 700mA. <b>Vf 17,8V DC.</b> Tunable white: 10W at 500mA. CH1 max 10W or <b>CH1+CH2 max 10W. Vf 17,8V DC</b>
lamp lumens	1600lm
delivered lumens	IP30: 1190lm (30°) - 1300lm (50°) - 1350lm (70°) IP44 / IP66: 1050lm (30°) - 1175lm (50°) - 1220lm (70°)
lumen maintenance	50.000h L90
beam	30°, 50°, 70°. OKKIO 80 AD - 355° rotation and 90° tilt. Rotation via base and toolless adjustment that hold position with precision
kelvin	2700K CRI93, 3000K CRI93, 4000K CRI93 / 3 step MacAdam ellipse or Tunable white (1800K - 4000K) CRI93
special features	Safe wiring - Two wires dimming. Designed with high efficiency reflectors, delivers glare free homogeneous light. UGR<10 (30°), UGR<19 (50°), UGR<25 (70°)
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location



OKKIO 80 CL

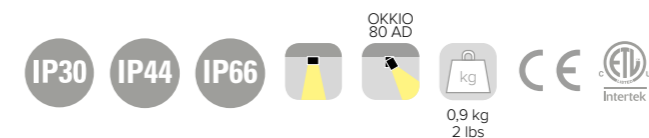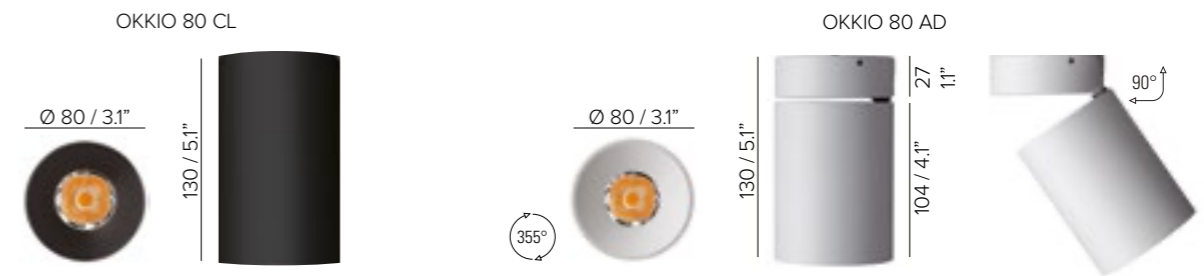

# OKKIO 80 CL / OKKIO 80 AD



## ORDER CODE

BASE CODE	A . POWER SUPPLY	B . KELVIN	C . BEAM	D . FINISHES	E . OTHER
<b>65252</b> OKKIO 80 CL <b>65302</b> OKKIO 80 AD adjustable	<b>L</b> 500/700 mA power supply NOT included  <b>U</b>  listed 500/700 mA power supply NOT included	<b>4</b> 4000K CRI93 <b>5</b> 3000K CRI93 <b>8</b> 2700K CRI93 <b>7</b> tunable white 1800K - 4000K CRI93	<b>4</b> spot 30° <b>F</b> spot 30°, softening glass <b>5</b> flood 50° <b>G</b> flood 50°, softening glass <b>8</b> wide flood 70° <b>H</b> wide flood 70°, softening glass	<b>2</b> black RAL 9005   <b>E</b> white RAL 9003 black reflector RAL 9005 	<b>6</b> white RAL 9003   <b>F</b> golden bronze 
Example: <b>65252</b>	<b>L</b>	<b>8</b>	<b>4</b>	<b>6</b>	<b>A</b>
= <b>65252-L846A</b>					
<b>E . OTHER</b> <b>A</b> IP30 <b>B</b> IP44 <sup>2</sup> <b>C</b> IP66 <sup>2</sup> <sup>2</sup> only for OKKIO 80 CL					

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

	code	output power	input voltage / frequency	IP	dimensions mm
Power supply 700 mA max No. fixtures	69089	ON/OFF, 25W / max 1	176-264V	50-60Hz	IP20 L135xW38xH28
	69210	ON/OFF, 31W / max 2	176-275V	50-60Hz	IP20 L147xW44xH30
Power supply for Tunable white 500 mA max No. fixtures	69092	1-10V, 25W / max 1	99-264V	50-60Hz	IP20 L103xW67xH21
	69209	1-10V, 50W / max 3	99-264V	50-60Hz	IP20 L124xW79xH22
Class 2 power supply 700 mA	69074	DALI, 32W / max 2	110-240V	50-60Hz	IP20 L103xW67xH21
	69207	DALI, 30W / max 2	99-264V	50-60Hz	IP67 L122xW54xH26
	69119	DALI DT8, 25W / max 2	198-264V	50-60Hz	IP20 L123xW79xH30

Consult **B LIGHT North America**  
 Lighting Group Network  
 T: 212.775.6363  
 E: info@lightinggroupnetwork.com

Power supply selection		
DC MIN Output (Vf)	LED < 17,8V DC <	DC MAX Output (Vf)